




## CONNECTIONS

- Discharge: 3/4" or 1"
- Inlet: 1-1/2"
- Vent: 1-1/2"
- Easy-access to blade, pressure chamber/electrical parts for easy service/replacement.

## PRODUCT FEATURES

- Install a half bathroom up to 15 feet below the sewer line, or even up to 150 feet away.
- Macerating system for residential applications.
- The blade is made out of a hardened stainless steel material which eliminates the need for any service or replacement.

## PUMP CURVE

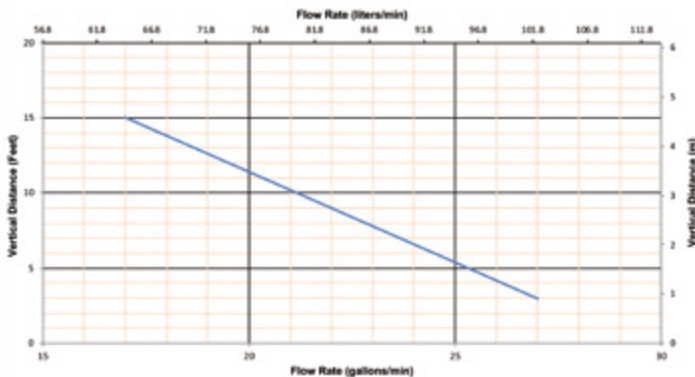

## OPTIONAL ACCESSORIES

**Extension Pipe**  
(Part N° 030)  
See page 28



**Descaler**  
(Part N° 052)  
See page 28



## TECHNICAL SPECIFICATIONS

- Pump type:** Macerator
- Electrical:** 120 V - 60 Hz / 4.5 Amps (Max)
- Motor:** 0.5 HP oil-filled thermally protected motor
- Capacitor rating:** 45 microfarad
- Operating Temperature:** 104°F (110°F Max.)
- Power cord length:** 51 inches
- Noise level:** ≤ 53 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 3/4" or 1"
- Discharge rate at 15 ft:** 17 GPM
- Discharge rate at 3 ft:** 27 GPM
- Shut-off head:** 30 ft.
- Normal running time:** 10-12 seconds
- Capacity:** 2.3 gallons / 8.7 liters
- Inlets:** 1-1/2" (side), 1-1/2" vent (side)
- Method of activation:** Membrane/microswitch
- Weight:** 15 lbs / 6.8 kg
- Certifying agencies:** CSA (IPC, NSPC), IAPMO (UPC)
- Connections:** Saniflo's rear outlet toilet, sink

## DIMENSIONAL DRAWINGS

