




CONNECTIONS

- Discharge: 3/8"
- Inlet: 1"

PRODUCT FEATURES

- A compact pump used to pump condensate from condensing boilers, HVAC systems, water heater systems, etc.
- Pump condensate waste up to 15 feet in height and/or 150 feet away from a soil stack.

PUMP CURVE

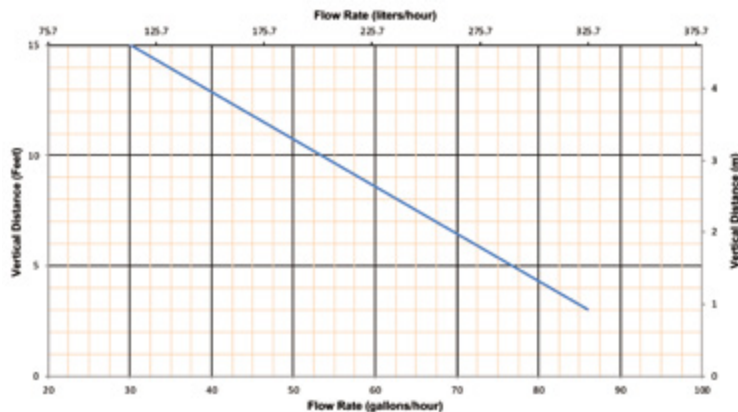

TECHNICAL SPECIFICATIONS

- Pump type:** Condensate Pump
- Electrical:** 120 V - 60 Hz / 1.5 Amps (Max)
- Motor:** 1/30 HP oil-filled thermally protected motor
- Operating Temperature:** 160°F Max
- Power cord length:** 60 inches
- Noise level:** ≤ 44 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 3/8"
- Discharge rate at 15 ft:** 30 GPH
- Discharge rate at 3 ft:** 86 GPH
- Normal running time:** 3-5 seconds (Short bursts)
- Capacity:** 0.5 gallons / 1.9 liters
- Inlets:** 1" (top)
- Method of activation:** Float/microswitch
- Weight:** 7 lbs / 3.1 kg
- Certifying agencies:** CSA (IPC, NSPC)
- Connections:** Condensing boiler, HVAC systems, air conditioners

DIMENSIONAL DRAWINGS

