




## CONNECTIONS

- Discharge: 3/4" or 1"
- Inlet: 2"
- Vent: 1-1/2"
- Easy-access to pressure chamber/electrical parts for easy service/replacement.

## PRODUCT FEATURES

- Install a complete bathroom up to 25 feet below the sewer line, or even up to 150 feet away.
- Stainless steel grinder system for both residential and commercial applications.
- Handle sanitary products that may have been flushed down the toilet; sanitary napkins, q-tips, dental floss, etc.

## PUMP CURVE

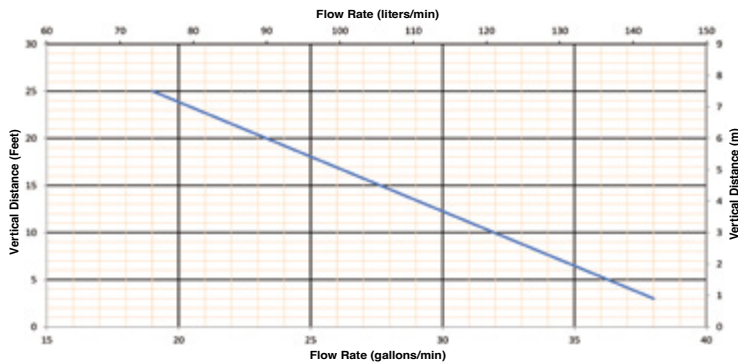

## OPTIONAL ACCESSORIES

**Sanialarm**  
(Part N° 050)  
See page 28



**Descaler**  
(Part N° 052)  
See page 28



## TECHNICAL SPECIFICATIONS

- Pump type:** Grinder
- Electrical:** 120 V - 60 Hz /9 Amps (Max)
- Motor:** 1 HP oil-filled thermally protected motor
- Capacitor rating:** 60 microfarad
- Operating Temperature:** 104°F (110°F Max.)
- Power cord length:** 49 inches
- Noise level:** ≤ 63 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 3/4" or 1"
- Discharge rate at 25 ft:** 19 GPM
- Discharge rate at 3 ft:** 38 GPM
- Shut-off head:** 38 ft.
- Normal running time:** Depends on toilet system
- Capacity:** 3.2 gallons / 12.1 liters
- Inlets:** 2" (sides), 1-1/2" vent (top)
- Method of activation:** Membrane/microswitch
- Shower/bathtub base height:** 8" min
- Weight:** 30 lbs / 13.6 kg
- Certifying agencies:** CSA (IPC, NSPC), IAPMO (UPC)
- Connections:** Bottom outlet toilet, sink, shower/bathtub, washing machine (indirect connection via laundry sink)

## DIMENSIONAL DRAWINGS

