




## CONNECTIONS

- Discharge: 1", 1-1/4" or 1-1/2"
- Inlet: 1-1/2"
- Vent: 1-1/2"

## PRODUCT FEATURES

- Used to pump gray water away from a variety of fixtures in residential applications.
- The system is able to discharge the waste up to 14 feet vertical and/or 140 feet horizontal.

## PUMP CURVE

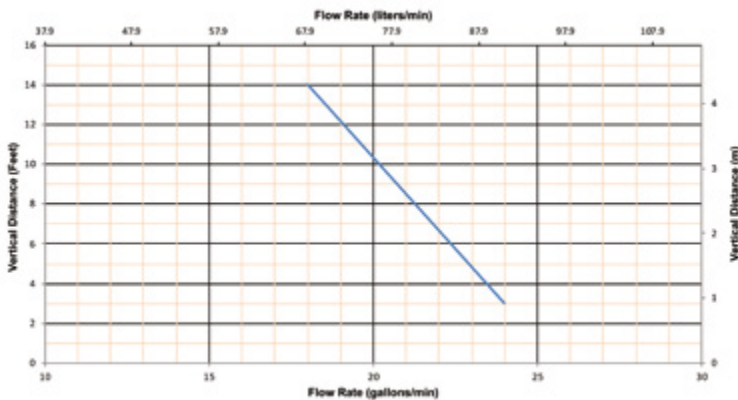

## OPTIONAL ACCESSORIES

**Descaler**  
(Part N° 052)  
See page 28



## TECHNICAL SPECIFICATIONS

- Pump type:** Drain pump
  - Electrical:** 120 V – 60 Hz / 4.5 Amps (Max)\*
  - Motor:** 0.3 HP oil-filled thermally protected motor
  - Capacitor rating:** 30 microfarad
  - Operating Temperature:** 140°F
  - Power cord length:** 48 inches
  - Noise level:** ≤ 44 dBA (Lp) (measured at 3 ft.)
  - Discharge pipe diameter:** 1"- 1-1/2"
  - Discharge rate at 14 ft:** 18 GPM
  - Discharge rate at 3 ft:** 24 GPM
  - Shut-off head:** 25 ft.
  - Normal running time:** 3-5 seconds (Short bursts)
  - Capacity:** 2.75 gallons / 10.4 liters
  - Inlets:** 1-1/2" (sides), 1-1/2" vent (top)
  - Method of activation:** pressure switch/ circuit board
  - Shower base height:** 6" min
  - Weight:** 13 lbs / 5.9 kg
  - Certifying agencies:** CSA (IPC, NSPC)
  - Connections:** Sink, shower, washing machine (indirect), dishwasher, laundry sink, etc.
- \* Measured using 1" discharge. Information will vary once the discharge size is increased. Consult with factory.

## DIMENSIONAL DRAWINGS

