

14 Ft
140 Ft



LIGHT COMMERCIAL GRADE


CONNECTIONS

- Discharge: 1", 1-1/4" or 1-1/2"
- Inlet: Two 2" and one 1-1/2"
- Vent: 1-1/2"
- Easy-access to pressure chamber/electrical parts for easy service/replacement.

PRODUCT FEATURES

- Used to pump gray water away from a variety of fixtures in residential and commercial applications.
- The system is able to discharge the waste up to 14 feet vertical and/or 140 feet horizontal.

PUMP CURVE

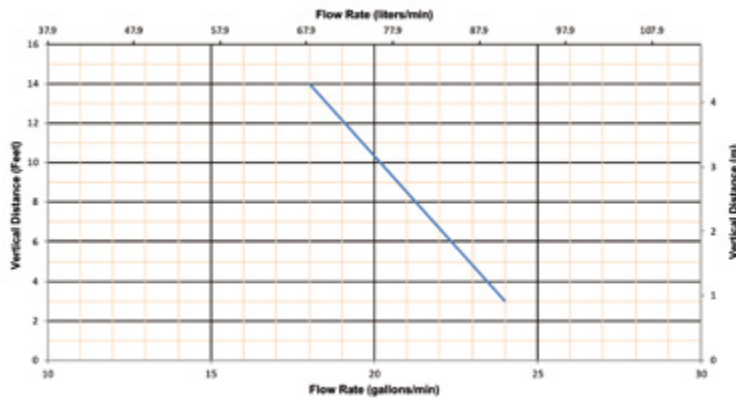

OPTIONAL ACCESSORIES

Descaler
(Part N° 052)
See page 28



TECHNICAL SPECIFICATIONS

- Pump type:** Drain pump
- Electrical:** 120 V – 60 Hz / 4.5 Amps (Max)*
- Motor:** 0.3 HP oil-filled thermally protected motor
- Capacitor rating:** 30 microfarad
- Operating Temperature:** 140°F
- Power cord length:** 48 inches
- Noise level:** ≤ 44 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 1"- 1-1/2"
- Discharge rate at 14 ft:** 18 GPM
- Discharge rate at 3 ft:** 24 GPM
- Shut-off head:** 25 ft.
- Normal running time:** 3-5 seconds (Short bursts)
- Capacity:** 2.9 gallons / 11 liters
- Inlets:** 2" (sides), 1-1/2" vent (top)
- Method of activation:** pressure switch/ circuit board
- Shower base height:** 6" min
- Weight:** 16 lbs / 7.3 kg
- Certifying agencies:** CSA (IPC, NSPC), IAPMO (UPC)
- Connections:** Sink, shower, washing machine (indirect), dishwasher, laundry sink, etc.

* Measured using 1" discharge. Information will vary once the discharge size is increased Consult with factory.

DIMENSIONAL DRAWINGS

